




Ensuring a weather tight seal for metal to metal installations is easy with ProZ™ SD. The design of the washer head reduces overdriving and can never red rust with the zinc aluminum alloy cap. ProZ™ SD provides a strong cap that withstands the toughest installation conditions and is compatible with all panel finishes.

Self-drilling #3, #5 and stitch drill points available.

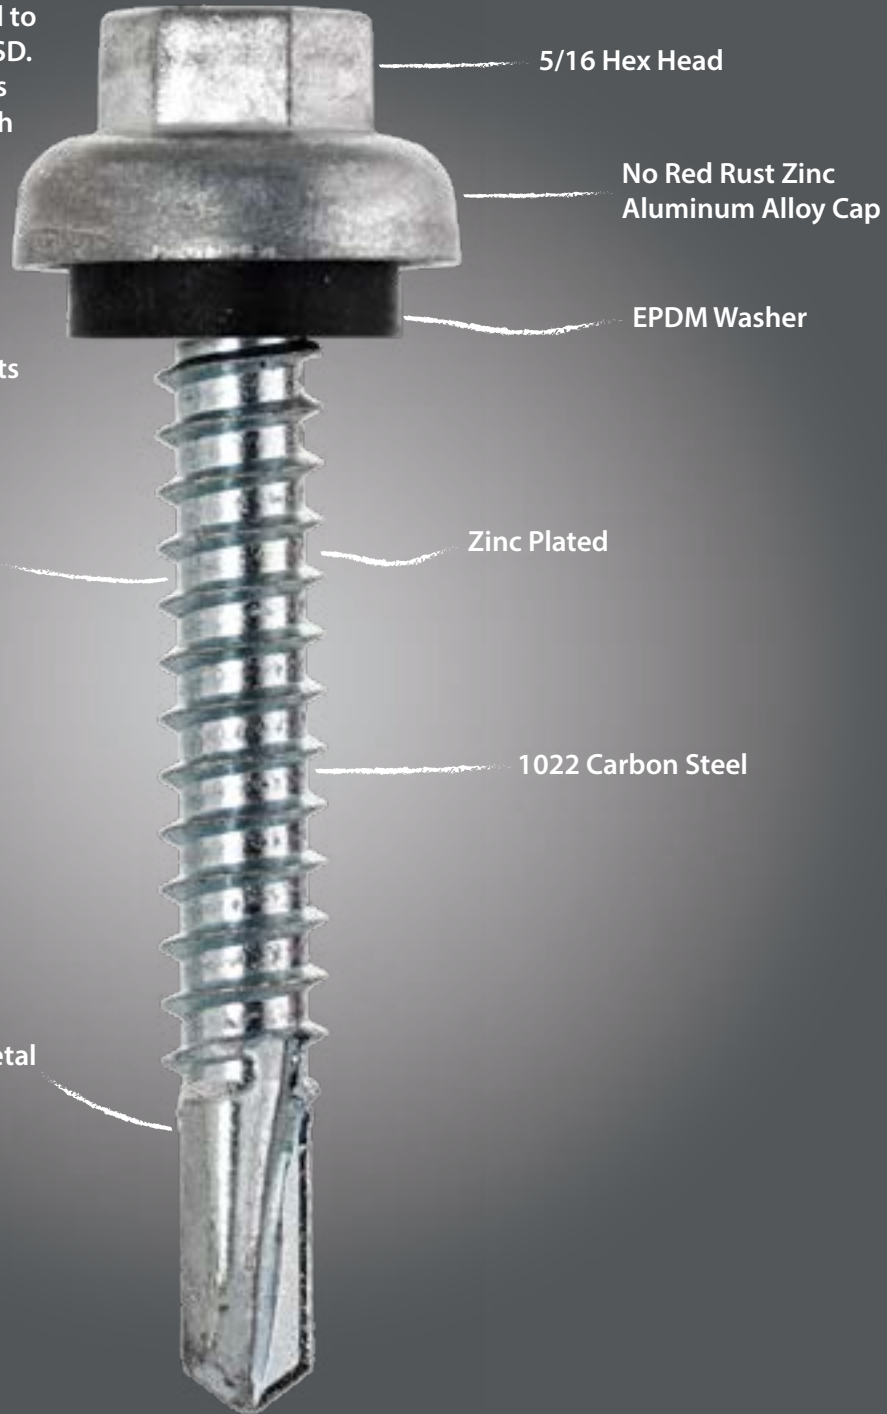

ProZ SD

Part#	Description	Head Style	Drill Point	Pcs/Bx	Lb/Box
121PZSD	#12-14 x 1"	5/16 Hex	#3	3000	28.1
12114PZSD	#12-14 x 1-1/4"	5/16 Hex	#3	2500	27.9
12112PZSD	#12-14 x 1-1/2"	5/16 Hex	#3	2000	27.5
122PZSD	#12 - 14 x 2"	5/16 Hex	#3	2000	26.1
123PZSD	#12 - 14 x 3"	5/16 Hex	#3	500	19.7



EPDM Washer

Pull Out Strength	Substrate	Pull Out Strength
	20 ga HRS	302
	18 ga HRS	418
	16 ga HRS	587
	14 ga HRS	723
	12 ga HRS	1223



#12 Shank

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	577
	AZ55 Galvalume	26	0.018	855
	AZ55 Galvalume	24	0.024	1213
	AZ55 Galvalume	22	0.03	1254



#3 Drill Point

Shear	Tensile	Torsional
2800	4500	129

Also Available:



ProZ SD
#5



Metalgrip™
#3



Metalgrip™
#5



ProZ
MINI-DRILLER™
#10 Hi-Lo